



TRIAX

connecting the future

TRIAX[®] Aerials

800 & 700 MHz, LTE Protected


The single most important part of an installation is the quality of the incoming signals

TRIAX UHF aerials take the disruption out of your installation and protect against LTE signal interference.

We're your reliable partner for ensuring quality signals from rooftop to outlet.

With TRIAX quality range of aerials you'll enjoy:

- Interference protection from LTE signals
- Mechanical filtering for higher gain
- Quick and easy installation
- Exceptional build quality and durability
- Corrosion and weather proof

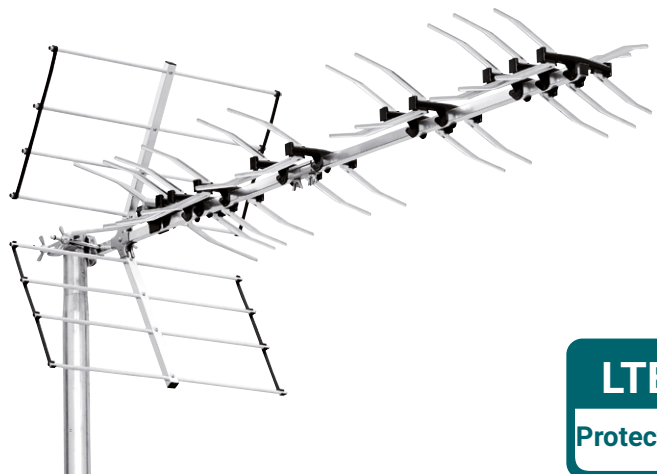

triax.uk




TRIAX

connecting the future

TRIAX 800 & 700 MHz Aerials

A full range of benefits



Quality mechanical brackets

Strong, sturdy and easy to install

18x18mm boom

Durable and robust

Semi-assembled

Saving time during installation

Mechanical filtering

Higher gain than electronic filters



Improved dipole housing

Sealed F connector & weatherproof boot

LTE protected

All our aerials are designed to receive DTT signals in 470-694 and 470-790 MHz ranges. They secure against TV signal interference by rejecting 4G/LTE mobile signals in the 694-790 and 790-862 MHz range.



DIGI series



DIGI 14



DIGI 18

UNIX series



UNIX 32



UNIX 52

Type	Art. No.	Model	Gain (dBi)	Front to back ratio (dB)	Dimensions L x W (mm)
DIGI 14	105470	700	13.5	23.0	1085x480
	105420	800	13.5	25.0	1015x420
DIGI 18	105480	700	14.0	25.0	1414x480
	105430	800	14.5	25.0	1446x420
UNIX 32	105550	700	12.5	22.0	777x580
	105500	800	12.5	24.0	791x500
UNIX 52	105560	700	14.5	20.0	1394x580
	105514	800	14.5	25.0	1512x500